



## SHENZHEN OTTIMA TECHNOLOGY CO., LTD.

Add: Floor 3, Building 8, Lihao Industrial Park, 78 Ainan Road, Baolong Street, Longgang District, Shenzhen, Guangdong, China.

Tel: 0086-755-89257015 Fax: 0086-755-89257085

Web: <https://szottima.en.alibaba.com> / <https://www.ottima-tech.com>

### Triac ELV MLV Dimmable Transformer 200W

## Features



**SELV  
Class P  
TYPE HL**



Dimming function:	Electronic Transformer Triac/ ELV/ MLV dimming
Dimming range:	0-100%
Certificates:	UL listed, Class P, Type HL, SELV, RoHS
Location of application:	Dry, damp and wet locations
Input:	120VAC
THD:	THD<20%@120V Max. load
Output type:	Constant voltage
Small size:	166.4x103.5x40.4 mm / 6.55x4.07x1.59 inch (L*W*H)
Loading:	Super low loading request, works perfect at 10-100% load
Protections:	Short circuit / over load
Compatibility:	Compatible with popular dimmers in the market, Lutron-CL, Diva series and so on.
Application:	<ul style="list-style-type: none"><li>• LED strip/ LED tape/ LED module</li><li>• Residential Lighting</li><li>• Commercial Lighting</li></ul>
Warranty:	5 years warranty

## Specification

Model Number	OTM-TD200-JA24
<b>OUTPUT</b>	
Rated Power	200W
Rated Voltage	24V
Rated Current	8.34A
Voltage Tolerance	±1.5V
<b>INPUT</b>	
Voltage Range	120V
Frequency Range	47-63Hz
Power Factor(typ.)	0.94@120VAC
Total Harmonic Distortion	THD< 20%(@100% load)
Efficiency (Typ.)	90%@120VAC
AC Current (Typ.)	1.78A
Leakage Current	<0.5mA/ 120VAC
<b>PROTECTION</b>	
Short Circuit	shut down o/p voltage, re-power on to recover after fault condition is removed
Over Load	shut down o/p voltage, re-power on to recover after fault condition is removed
<b>ENVIRONMENT</b>	
Working Temp.	Tcase=-40 ~ +60 (Please refer to "OUTPUTLOAD vs TEMPERATURE" section)



# SHENZHEN OTTIMA TECHNOLOGY CO., LTD.

Add: Floor 3, Building 8, Lihao Industrial Park, 78 Ainan Road, Baolong Street, Longgang District, Shenzhen, Guangdong, China.


Tel: 0086-755-89257015 Fax: 0086-755-89257085

Web: <https://szottima.en.alibaba.com> / <https://www.ottima-tech.com>

## Triac ELV MLV Dimmable Transformer 200W

Working humidity	20 ~ 95% RH non-condensing
Storage temp., Humidity	-40 ~ +90, 10 ~ 95% RH
Temp .coefficient	±0.03%/°C (0~50°C)
Vibration	10~500Hz, 5G 10min./1 cycle, period for 60min. each along X,Y,Z axes
<b>SAFETY &amp; EMC</b>	
Safety standards	UL8750
Withstand voltage	I/P-O/P: 1.88KVAC
<b>OTHERS</b>	
Weight	0.33/kg
Dimension	See Mechanical Specification
Packing	45*25.5*24 cm (20PCS/CTN )

## Mechanical Specification

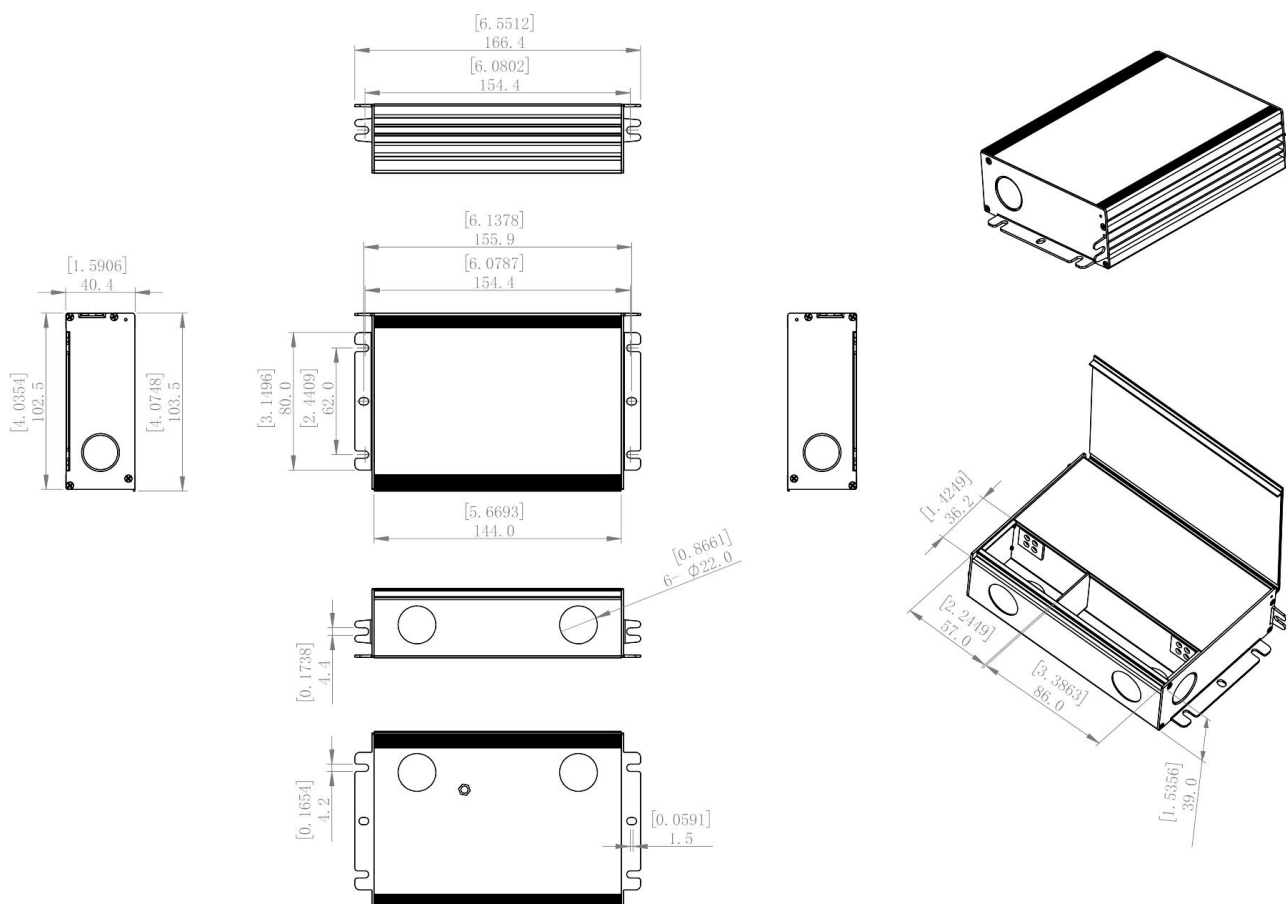



## SHENZHEN OTTIMA TECHNOLOGY CO., LTD.



Add: Floor 3, Building 8, Lihao Industrial Park, 78 Ainan Road, Baolong Street, Longgang District, Shenzhen, Guangdong, China.

Tel: 0086-755-89257015 Fax: 0086-755-89257085


Web: <https://szottima.en.alibaba.com> / <https://www.ottima-tech.com>

### Triac ELV MLV Dimmable Transformer 200W

## Wiring Diagram

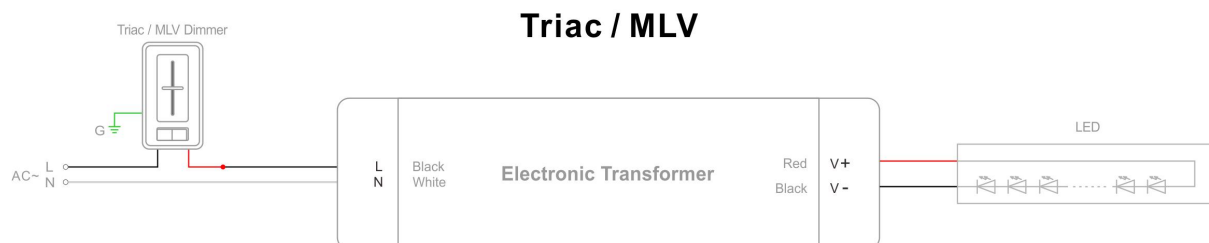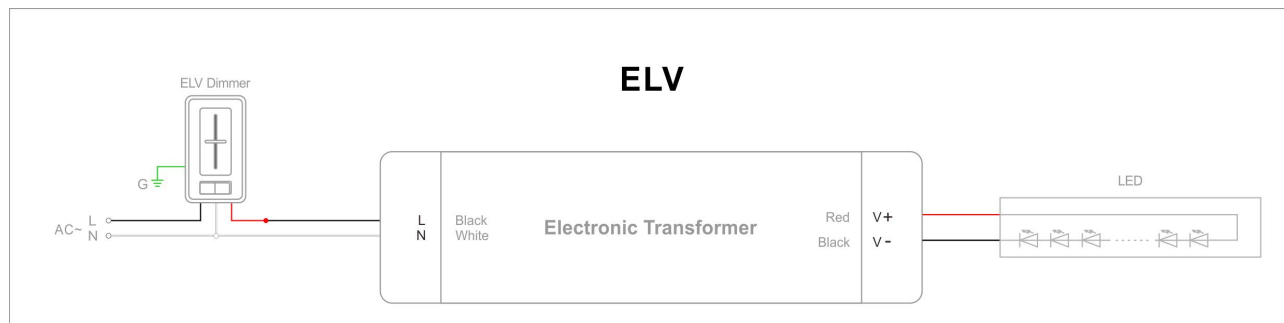

## Load vs Ambient Temperature

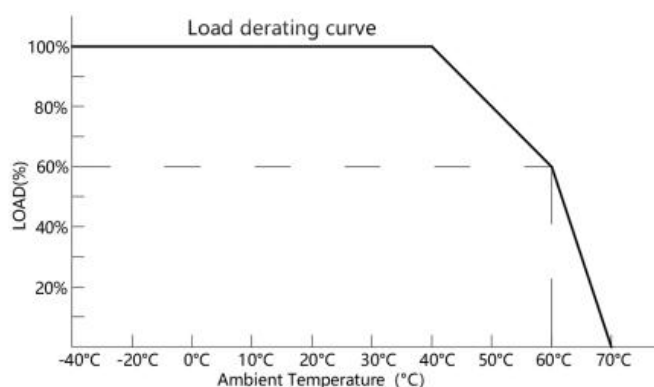

❖ To extend their life, please refer to the Derating Curve and derate according to the temperature.

## Warm tips :

1. All Electronic Transformer meet the harmonic emissions requirements of ANSI C82.77-10.