



SHENZHEN OTTIMA TECHNOLOGY CO., LTD.

Add: Floor 3, Building 8, Lihao Industrial Park, 78 Ainan Road, Baolong Street, Longgang District, Shenzhen, Guangdong, China.

Tel: 0086-755-89257015 Fax: 0086-755-89257085

Web: <https://szottima.en.alibaba.com> / <https://www.ottima-tech.com>

Driver+ Switch 2 in 1 Constant Voltage Non-Dimmable 96W

Features

	Output:	Constant Voltage
	Input Range:	120VAC
	PFC design:	Built-in active PFC function
	Protections:	Short circuit/ Over load/ Over temperature
	Heat dissipation:	Cooling by free air convection
	Waterproof performance:	For dry and damp locations (US)
	Design features:	1) Fine-tune output voltage can be adjusted slightly 2) ON/OFF Switch 3) 3-Way switches 4) Output Class 2 5) Eliminated compatibility issues between drivers and switches
	Application:	Suitable for the application of LED lighting
	Warranty:	5 years warranty
	Others:	Flicker-free

Specification



Model		OTM-BD96-24-N	OTM-BD96-48-N
Certificate		UL / cUL / FCC / Class P / Class 2/ SELV / RoHS / Reach	
Output	DC Rate Voltage	24V (24V-26V adjust by knob)	48V (48V-50V adjust by knob)
	Voltage Tolerance	±0.5V	
	Load Regulation	≤1%	≤1%
	Line Regulation	≤0.5%	
	Rated current	4A	2A
	Rated power	96W	96W
Input	Voltage Range	120VAC	
	Frequency Range	47 - 63Hz	
	Power Factor @ full load	≥0.99	
	THD(Typ.) @ full load	≤10%	
	Efficiency @ full load	91.0%	92.0%
	AC Current (Max.)	0.9A	0.9A
	Inrush Current (Typ.)	50A, 150us@50%Ipeak	
	Leakage current	<0.5mA	
Short Circuit		Hiccup mode, recovers automatically after fault condition is removed	

Specializing in LED Driver Since 2006...



SHENZHEN OTTIMA TECHNOLOGY CO., LTD.

Add: Floor 3, Building 8, Lihao Industrial Park, 78 Ainan Road, Baolong Street, Longgang District, Shenzhen, Guangdong, China.


Tel: 0086-755-89257015 Fax: 0086-755-89257085

Web: <https://szottima.en.alibaba.com> / <https://www.ottima-tech.com>

Driver+ Switch 2 in 1 Constant Voltage Non-Dimmable 96W

Protection	Over Load	≥110% Constant current mode, recovers automatically after fault condition is removed
	Over temperature	Shell surface temperature 100°C±10°C shut down o/p voltage, automatically recover after cooling
Environment	Working TEMP.	-40~+50°C (see below derating curve)
	Working Humidity	20 - 95%RH non-condensing
	Storage TEM., Humidity	-40 - +80°C, 10 - 95% RH non-condensing
	TEMP. coefficient	±0.03%/°C (0 - 50°C)
	Vibration	10~500Hz, 2G 12min./1 cycle, period for 72 min. each along X,Y,Z axes
Safety & EMC	Safety standards	UL8750 CAN/CSA-C22.2 No.250.13 (US)
	Withstand voltage	I/P-O/P: 1.8KVAC I/P-FG: 1.8KVAC O/P-FG: 0.5KVAC (US)
	Isolation resistance	I/P-O/P: 100M Ω / 500VDC / 25°C / 70% RH
	EMC Immunity	FCC/ICES do not request this test (US)
	EMC Emission	FCC Part15 Subpart B ANSI C63.4:2014 (US)
Others	Net Weight	0.25kg/unit
	Dimension	105*54*51mm / 4.134"x2.126"x1.996" (in)
	Packing	
Notes	1. All parameters NOT specially mentioned are measured at 120VAC input, rated load and 25°C of ambient temperature. 2. Tolerance: includes set up tolerance and load regulation.	

Derating Curve (Output power VS Ambient TEMP)

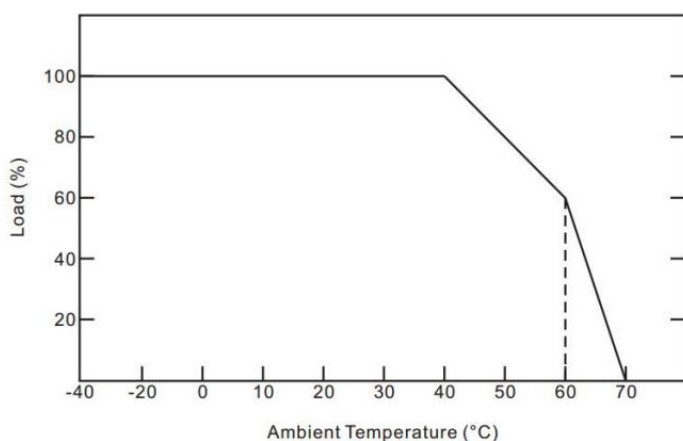

1. To extend their life, please refer to the Derating Curve and derate according to the temperature.
2. The output current of the LED driver should be selected according to the rated current of the lamp and the ambient temperature.

Normally, we recommend the power supply to reserve a certain amount of load to extend LED driver's life.



SHENZHEN OTTIMA TECHNOLOGY CO., LTD.


Add: Floor 3, Building 8, Lihao Industrial Park, 78 Ainan Road, Baolong Street, Longgang District, Shenzhen, Guangdong, China.

Tel: 0086-755-89257015 Fax: 0086-755-89257085

Web: <https://szottima.en.alibaba.com> / <https://www.ottima-tech.com>

Driver+ Switch 2 in 1 Constant Voltage Non-Dimmable 96W

Mechanical Specification

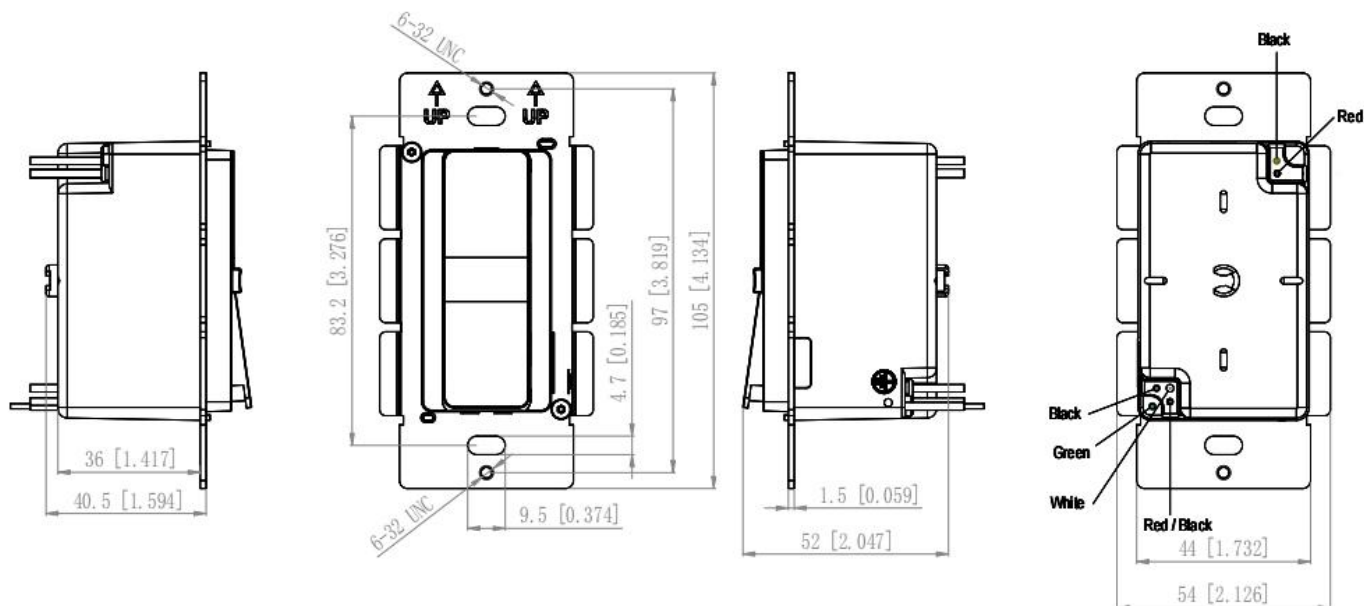

American Wire Gauge SD01	
Input wire	Black cable (L), Red black cable (L1), White cable (N) and Green cable (FG) (4*18AWG)
Output wire	Red cable (V+), Blue cable (V-) (2*18AWG)

Warm tips:

- Any other requests, we can customize.
- Please ensure that the connection is correct.



SHENZHEN OTTIMA TECHNOLOGY CO., LTD.

Add: Floor 3, Building 8, Lihao Industrial Park, 78 Ainan Road, Baolong Street, Longgang District, Shenzhen, Guangdong, China.


Tel: 0086-755-89257015 Fax: 0086-755-89257085

Web: <https://szottima.en.alibaba.com> / <https://www.ottima-tech.com>


Driver+ Switch 2 in 1 Constant Voltage Non-Dimmable 96W

Connecting Diagram

① SDD-ND model for standard system

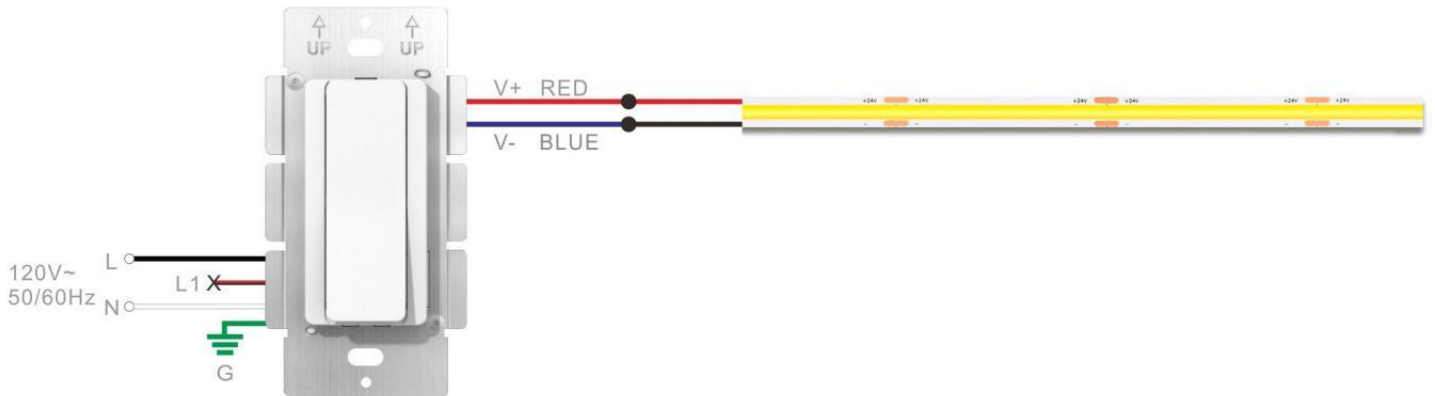

② SDD-ND model for 3-way system

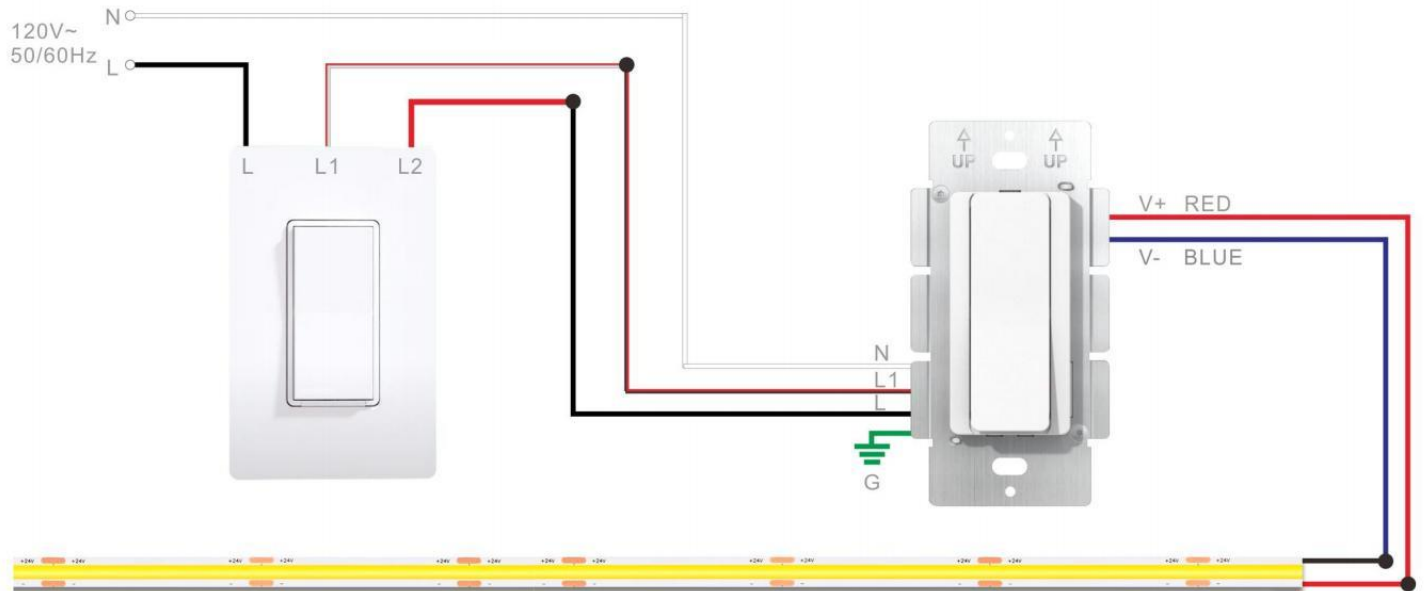

Note: Dimmer's panel is not replaceable.



SHENZHEN OTTIMA TECHNOLOGY CO., LTD.

Add: Floor 3, Building 8, Lihao Industrial Park, 78 Ainan Road, Baolong Street, Longgang District, Shenzhen, Guangdong, China.

Tel: 0086-755-89257015 Fax: 0086-755-89257085

Web: <https://szottima.en.alibaba.com> / <https://www.ottima-tech.com>

Driver+ Switch 2 in 1 Constant Voltage Non-Dimmable 96W

Knob to adjust the voltage

Clockwise rotation of the high voltage



MANUAL VOLTAGE TUNING

(+/-2V) FOR OUTPUT OPTIMIZATION

Instructions

1. This driver should be installed by qualified and professional person.
2. Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
3. Ensure that connection is correct to avoid LED light or driver be damaged.
4. If the driver cannot work normally, don't maintain privately.

Have any questions, please contact us